

**BRACHE IN FUNE  
ACCIAIO A 3-4 TRATTI****3-4 LEGS SLING  
WIRE ROPE****Caratteristiche generali:**

Tiranti in fune acciaio lucido o zincato con asole o radance ad ogni estremità impiombate con manicotti pressati talurit a norma EN 13411

**Coefficiente di sicurezza:**

CMU 1:5 Carico di rottura

**Certificazione:**

- Certif. di conformità "CE" a norma EN 13414-1
- Italmet può fornire a richiesta certificazione con Ente di Classifica IACS quali RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - altri

- "EC" declaration of conformity acc. to EN 13414-1
- Italmet can be supplied, upon request, third parties test certificate with IACS member such RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - others

**Main characteristic:**

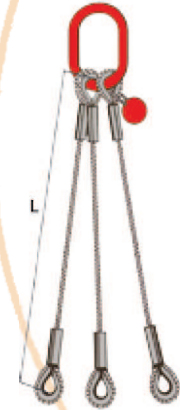
Sling wire rope single leg, galvanized or ungalvanized rope with soft eyes or heavy stub-end galvanized thimbles on ends spliced by talurit clamps Acc. to EN 13411

**Safety factor:**

MBL equals 5xSWL

**Certificates:****T3TR**

3 tratti con radance  
3 legs with thimbles

**T3TS**

3 tratti con grilli  
3 legs with shackles

**T3TG**

3 tratti con ganci linguetta di sicurezza  
3 legs with hook with safety latch

**T4TR**

4 tratti con radance  
4 legs with thimbles

**T4TS**

4 tratti con grilli  
4 legs with shackles

**T4TG**

4 tratti con ganci linguetta di sicurezza  
4 legs with hook with safety latch

