

**TEXTILE
ROUND SLINGS**



**BRACHE IN POLIESTERE
ANELLO CONTINUO**

Material:
100% Polyestere high tenacity

Safety factor:
WLL 1:7 Breaking force

Standard:
UNI EN ISO 1492.2

Temperature Range:
-40° C up to +100° C

Certificates:

- "EC" declaration of conformity
- Italmat can be supplied, upon request, third parties test certificate with IACS member such RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - others

Materiale:
Poliestere 100% alta tenacità


Coefficiente di sicurezza:
CMU 1:7 carico di rottura

Norma di riferimento:
UNI EN ISO 1492.2

Temperatura di impiego:
-40° C fino a +100° C

Certificazione:

- Certificato di conformità "CE"
- Italmat può fornire a richiesta certificazione con Ente di Classifica IACS quali RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - altri

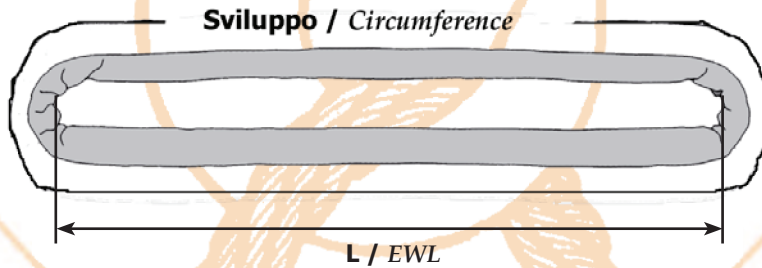

= 1 ton

| Codice Code | diametro diameter slings mm | 100% | | 80% | | da 7° a 45° | | da 45° a 60° | | Peso/ml weigh/mt gr |
|----------------|-----------------------------------|-------|--------|-------|-------|-------------|-------|--------------|--|---------------------------|
| | | kg | kg | kg | kg | kg | kg | | | |
| T1 | 48,5 | 1000 | 2000 | 800 | 1400 | 1000 | 270 | | | |
| T2 | 58,8 | 2000 | 4000 | 1600 | 2800 | 2000 | 445 | | | |
| T3 | 66,8 | 3000 | 6000 | 2400 | 4200 | 3000 | 560 | | | |
| T4 | 68,8 | 4000 | 8000 | 3200 | 5600 | 4000 | 760 | | | |
| T5 | 79,5 | 5000 | 10000 | 4000 | 7000 | 5000 | 940 | | | |
| T6 | 88,0 | 6000 | 12000 | 4800 | 8400 | 6000 | 1170 | | | |
| T8 | 97,5 | 8000 | 16000 | 6400 | 11200 | 8000 | 1535 | | | |
| T10 | 100,0 | 10000 | 20000 | 8000 | 14000 | 10000 | 2300 | | | |
| T12 | 110,0 | 12000 | 24000 | 9600 | 16800 | 12000 | 3000 | | | |
| T15 | 150,0 | 15000 | 30000 | 12000 | 21000 | 15000 | 4500 | | | |
| T20 | 150,0 | 20000 | 40000 | 16000 | 28000 | 20000 | 5500 | | | |
| T25 | 150,0 | 25000 | 50000 | 20000 | 35000 | 25000 | 7000 | | | |
| T30 | 200,0 | 30000 | 60000 | 24000 | 42000 | 30000 | 7700 | | | |
| T40 | 200,0 | 40000 | 80000 | 32000 | 56000 | 40000 | 12500 | | | |
| T50 | 300,0 | 50000 | 100000 | 40000 | 70000 | 50000 | 17500 | | | |

