

**FOUR LAYERS TEXTILE  
WEB SLINGS WITH  
REINFORCED EYES FLAT**



**BRACHE IN POLIESTERE  
A 4 STRATI CON ASOLE  
RINFORZATE**

**Material:**  
100% Polyestere high tenacity

**Safety factor:**  
WLL 1:7 Breaking force

**Standard:**  
UNI EN ISO 1492.1

**Temperature Range:**  
-40° C up to +100° C

**Certificates:**

- "EC" declaration of conformity
- Italmat can be supplied, upon request, third parties test certificate with IACS member such RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - others

**Materiale:**  
Poliestere 100% alta tenacità



**Coefficiente di sicurezza:**  
CMU 1:7 carico di rottura

**Norma di riferimento:**  
UNI EN ISO 1492.1

**Temperatura di impiego:**  
-40° C fino a +100° C

**Certificazione:**

- Certificato di conformità "CE"
- Italmat può fornire a richiesta certificazione con Ente di Classifica IACS quali RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - altri

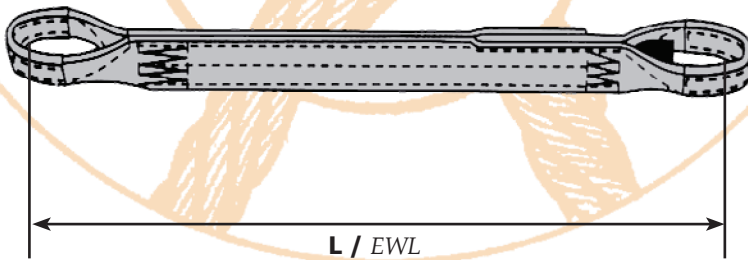

Codice Code	larghezza nastro width tape						spessore thickness	Peso/ml weigh/mt
		100%	200%	80%	140%	100%		
	mm	kg	kg	kg	kg	kg	mm	gr
TX/4/60	60	4000	8000	3200	5600	4000	13	800
TX/4/90	90	6000	12000	4800	8400	6000	14	1100
TX/4/120	120	8000	16000	6400	11200	8000	14	1600
TX/4/150	150	10000	20000	8000	14000	10000	15	2000
TX/4/180	180	12000	24000	9600	16800	12000	15	2400
TX/4/240	240	16000	32000	12800	22400	16000	15	3400
TX/4/300	300	20000	40000	16000	28000	20000	15	4500

