

MASTER LINK TYPE M - MF

USE WITH CHAIN OR WIRE ROPE
IN ACC. TO EN 1677-4

Material: High tensile grade
steel Ni Cr Mo T8 - Grade 80

Safety Factor:
WLL 1:4 Breaking force

Finish:
Painted Rustproof

Certificates:

- "EC" Declaration of conformity
- Italmat can be supplied, upon request, third parties test certificate with IACS members such RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - others



CAMPANELLA OVALE M - MF

PER BRACHE IN FUNE O CATENA
A NORMA EN 1677-4


Materiale: Acciaio ad elevata
resistenza Ni Cr MO T8 - Grado 80

Coefficiente di sicurezza:
CMU 1:4 Carico di rottura

Finitura: Verniciatura
colorata antiruggine

Certificazione:

- Certificato di conformità "CE"
- Italmat può fornire a richiesta certificazione con Ente di Classifica IACS quali RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - altri

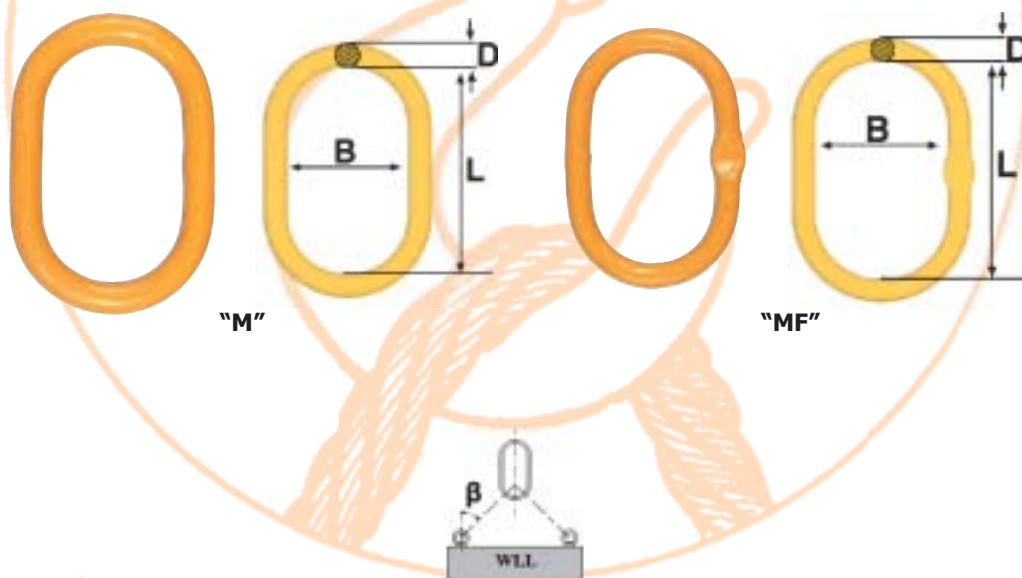

| Codice Code | CMU* WLL* | Dimensioni Main dimension | | | Peso Weight | |
|----------------|----------------|------------------------------|---------|---------|----------------|---------|
| | | B 0-45° kg | L mm | B mm | | D mm |
| CGM-6-8 | CGMF-6-8*** | 1250 | 100 | 60 | 11 | 0,2 |
| CGM-86-8 | CGMF-86-8*** | 2500 | 120 | 70 | 14 | 0,4 |
| CGM-108-8 | CGMF-108-8*** | 4000 | 140 | 80 | 17 | 0,8 |
| CGM-13-8 | CGMF-13-8*** | 5400 | 150 | 90 | 19 | 1 |
| CGM-1310-8 | CGMF-1310-8*** | 7500 | 160 | 95 | 22 | 1,5 |
| CGM-1613-8 | CGMF-1613-8*** | 10000 | 190 | 110 | 25 | 2,3 |
| CGM-19-8 | CGMF-19-8*** | 12000 | 200 | 120 | 30 | 3,5 |
| CGM-2016-8 | CGMF-2016-8*** | 17000 | 240 | 140 | 34 | 5,3 |
| CGM-2220-8 | CGMF-2220-8*** | 25000 | 250 | 150 | 38 | 7 |
| CGM-2622-8 | - | 28000 | 250 | 150 | 40 | 8 |
| CGM-32-8 | - | 33000 | 300 | 180 | 45 | 12 |
| CGM-3226-8 | - | 43000 | 300 | 200 | 50 | 15 |
| CGM-3632-8 | - | 56000 | 350 | 200 | 55 | 21 |
| CGM-4536-8 | - | 70000 | 375 | 210 | 60 | 26 |
| CGM-90T-8 | - | 90000 | 450 | 250 | 70 | 43 |
| CGM-100T-8 | - | 100000 | 450 | 260 | 80 | 57 |
| CGM-125T-8** | - | 125000 | 450 | 260 | 80 | 57 |

* If used for chain for corresponding WLL values in the WLL table acc EN818-4

** Dimensions L and B not acc, To EN 1677-4

*** With flattened section for use with BL

