

HOIST HOOK
UNI 9465 - DIN 15400



GANCIO SEMPLICE
UNI 9465 - DIN 15400

Finish:
Self coloured

Finitura:
Grezzo

Standard:
UNI 9469.1 - DIN 15401.1


Norma di riferimento:
UNI 9469.1 - DIN 15401.1

Certificates:

- "EC" declaration of conformity
- Certificate 3.1.B. in acc. to EN 10204 on request
- Italmat can be supplied, upon request, third parties test certificate with IACS member such RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - others

Certificazione:

- Certificato di conformità "CE"
- Certif. 3.1.B. a norma EN 10204 su richiesta
- Italmat può fornire a richiesta certificazione con Ente di Classifica IACS quali RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - altri

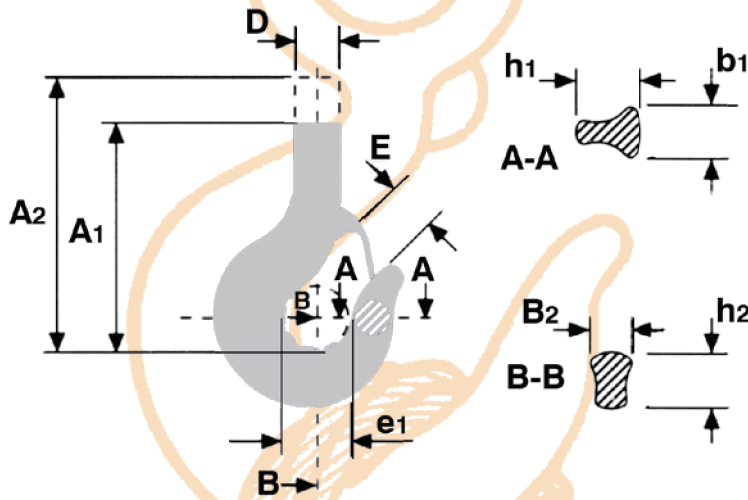

Codice	Misura	e1	E	b1	B2	D	h1	h2	A1	A2	Peso kg.
Code	Size	mm	mm	mm	mm	mm	mm	mm	mm	mm	Weight kg.
GS0006	0,06	25	20	12	11	14	17	14	85		0,2
GS0010	0,10	27	21	14	14	17	20	18	96		0,3
GS0012	0,12	30	24	19	15	16	22	19	115		0,4
GS0025	0,25	36	28	22	19	18	28	24	128		0,8
GS0050	0,50	43	34	29	24	24	37	31	167		1,6
GS0080	0,80	48	38	35	29	30	44	37	186		2,3
GS0100	1,00	50	40	38	32	30	48	40	197		3,2
GS0160	1,60	56	45	45	38	36	56	48	224		4,5
GS0250	2,50	63	50	53	45	42	67	58	253		6,3
GS0400	4	71	56	63	53	48	80	67	285	445	12,3
GS0500	5	80	63	71	60	53	90	75	318	490	19,5
GS0600	6	90	71	80	67	60	100	85	395	570	28,5
GS0800	8	100	80	90	75	67	112	95	430	585	36
GS1000	10	112	90	100	85	75	125	106	460	660	43
GS1200	12	125	100	112	95	85	140	118	525	710	68
GS1600	16	140	112	125	106	95	160	132	595	780	95
GS2000	20	160	125	140	118	106	180	150	665	815	112
GS2500	25	180	140	160	132	118	200	170	735	885	160
GS3200	32	200	160	180	150	132	224	190	810	1010	220
GS4000	40	224	180	200	170	150	250	212	905	1100	310
GS5000	50	250	200	224	190	170	280	236	990	1190	430
GS6300	63	280	224	250	212	190	315	265	1120	1320	600
GS8000	80	315	250	280	236	212	355	300	1270		860
GS8100	100	355	280	315	265	236	400	355	1415		1220
GS8120	125	400	315	355	300	265	450	375	1590		1740
GS8160	160	450	355	400	335	300	500	425	1790		2480
GS8200	200	500	400	450	375	335	560	475	2048		3420
GS8250	250	560	450	500	425	375	630	530	2305		4800

