

**UNI 1947
DEE SHACKLE**



Material:

Body: Fe 410 B
Pin: CB 4 FF (12 up to 20 mm)
Pin: Fe 410 B (22 up to 50 mm)

Safety factor:

WLL 1:5 Breaking force

Finish:

Galvanised Fe/Zn 5c

Certificates:

- "EC" declaration of conformity
- Italmat can be supplied, upon request, third parties test certificate with IACS member such RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - others

**GRILLO DIRITTO
UNI 1947**

Materiale:

Staffa: Fe 410 B
Perno: CB 4 FF (da 12 a 20 mm)
Perno: Fe 410 B (da 22 a 50 mm)

Coefficiente di sicurezza:


CMU 1:5 Carico di rottura

Finitura:

Zincato Fe/Zn 5c

Certificazione:

- Certificato di conformità "CE"
- Italmat può fornire a richiesta certificazione con Ente di Classifica IACS quali RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - altri

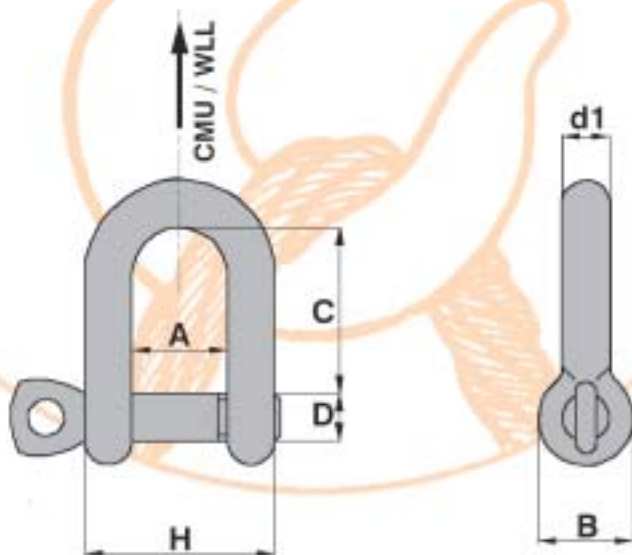

Codice Code	Misura / Size		Dimensioni / Main dimension					CMU WLL	Peso un. Weight
	D		C	A	B	H	d1		
	mm		mm	mm	mm	mm	mm	kg	g
GUNI12	12	M12	42	20	26	40	12	630	190
GUNI14	14	M14	46	22	29	44	13	800	250
GUNI16	16	M16	50	24	32	48	14	1000	320
GUNI18	18	M18	54	26	35	53	15	1300	430
GUNI20	20	M20	58	28	38	58	17	1600	590
GUNI22	22	M22	69	32	44	68	20	2000	930
GUNI25	25	M24	79	36	50	78	23	2500	1400
GUNI28	28	M27	90	40	56	88	26	3150	2200
GUNI32	32	M30	100	45	64	99	29	4000	2850
GUNI36	36	M36X3	110	50	72	110	32	5000	4400
GUNI40	40	M39X3	120	55	80	123	36	6300	5600
GUNI42	42	M42X3	131	60	85	136	40	8000	7650
GUNI45	45	M45X3	143	65	90	149	45	10000	10500
GUNI50	50	M48X3	155	70	100	164	50	12500	13900

