

GRILLO STANDARD

Grilli ad omega con perno, dado e coppiglia

**STANDARD SHACKLES**

Bow shackles with safety pin and bolt

Material:bow and pin high tensile steel,
Grade 6, quenched and tempered**Safety Factor:**

WLL 1:6 Breaking force

Standard:EN 13889 and meets performance requirements of
US Fed. Spec. RR-C-271 Type IVA Class 2, Grade A**Finish:** hot dipped galvanized

Temperature Range: -20°C up to +200°C

Certificates:**Materiale:**Staffa e perno in acciaio
legato ad alta resistenza, Grado 6**Coefficiente di sicurezza:**

CMU 1:6 Carico di rottura


Norme di riferimento:EN 13889 in accordo alla US Fed. Spec.
RR-C-271 Tipo IVA Classe 2, Grado A**Finitura:** zincato a caldo

Temperatura d'impiego: -20°C fino a +200°C

Certificazione:

- Certificato di conformità "CE"
- Certif. 3.1.B. a norma EN 10204 su richiesta
- Italmet può fornire a richiesta certificazione con Ente di Classifica IACS quali RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - altri

- "EC" declaration of conformity
- Certificate 3.1.B. in acc. to EN 10204 on request
- Italmet can be supplied, upon request, third parties test certificate with IACS member such RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - others

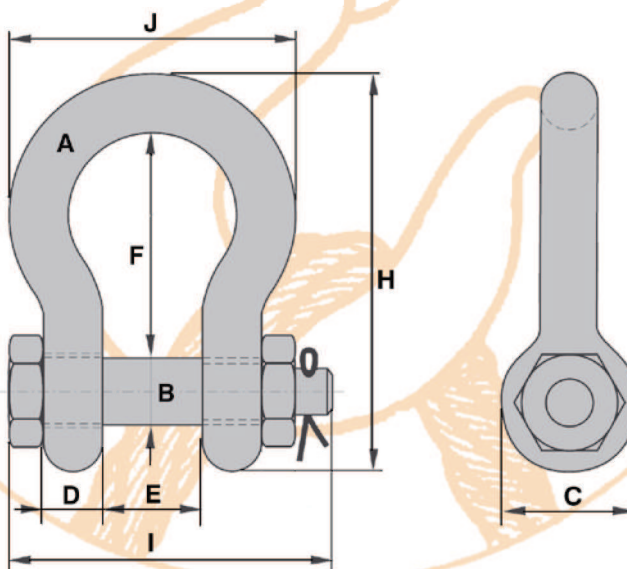

Codice	CMU	diametro staffa	diametro perno	ingombro esterno occhio	spessore occhio	luce utile al perno	luce utile interna	altezza totale	larghezza esterna con perno	larghezza esterna	peso unitario
Order code	WLL	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	length	length bolt	width bow	weight each
	t	A mm	B mm	C mm	D mm	E mm	F mm	H mm	I mm	J mm	kg
GOD-G-4163-0.50	0,5	7	8	17	7	12	29	54	43	37	0,06
GOD-G-4163-0.75	0,75	9	10	21	9	13,5	32	61	51	42	0,11
GOD-G-4163-1.00	1	10	11	23	10	17	36,5	71	61	49	0,16
GOD-G-4163-1.50	1,5	11	13	26	11	19	43	80	68	54	0,22
GOD-G-4163-2.00	2	13,5	16	34	13,5	22	51	91	83	63	0,42
GOD-G-4163-3.25	3,25	16	19	40	16	27	64	114	99	79	0,74
GOD-G-4163-4.75	4,75	19	22	47	19	31	76	136	115	94	1,18
GOD-G-4163-6.50	6,5	22	25	53	22	36	83	157	131	107	1,77
GOD-G-4163-8.50	8,5	25	28	60	25	43	95	176	151	124	2,58
GOD-G-4163-9.50	9,5	28	32	67	28	47	108	197	167	137	3,66
GOD-G-4163-12.00	12	32	35	74	32	51	115	218	179	154	4,91
GOD-G-4163-13.50	13,5	35	38	80	35	57	133	240	198	170	6,54
GOD-G-4163-17.00	17	38	42	89	38	60	146	262	203	183	8,19
GOD-G-4163-25.00	25	45	50	104	45	74	178	314	244	226	14,22
GOD-G-4163-35.00	35	50	57	119	50	83	197	358	270	250	19,85
GOD-G-4163-42.50	42,5	57	65	134	57	95	222	414	302	287	28,33
GOD-G-4163-55.00	55	65	70	145	65	105	260	463	330	329	39,59
GOD-G-4163-85.00	85	75	83	163	75	127	329	556	376	355	62