

**SWAGE SOCKET
JAW TYPE**



**CAPOCORDA A PRESSARE
A FORCELLA**

Material:
Drop forged steel C-1035

Safety factor:
WLL 1:5 Breaking force

Finish:
Selfcoloured

Certificates:

- "EC" declaration of conformity
- Certificate 3.1.B. in acc. to EN 10204 on request
- Italmat can be supplied, upon request, third parties test certificate with IACS member such RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - others


Materiale:
Acciaio forgiato C-1035

Coefficiente di sicurezza:
CMU 1:5 Carico di rottura

Finitura:
Grezzo

Certificazione:

- Certificato di conformità "CE"
- Certif. 3.1.B. a norma EN 10204 su richiesta
- Italmat può fornire a richiesta certificazione con Ente di Classifica IACS quali RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - altri

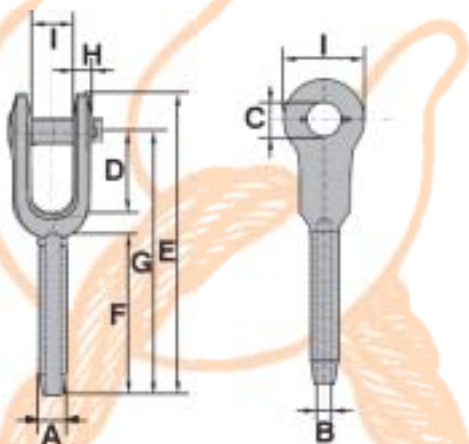

Codice	Ø fune	A	B	C	D	E	F	G	H	I	J	Peso/Weight
Code	Ø Rope	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
S-6414-06	6	13	7	17	38	121	54	102	8	17	35	0,25
S-6414-08	8	20	9	21	44	159	81	135	10	21	41	0,50
S-6414-10	10	20	12	21	44	159	81	135	10	21	41	0,49
S-6414-11	11	25	12	25	51	198	108	169	13	25	51	1,04
S-6414-13	13	25	14	25	51	198	108	169	13	25	51	1,02
S-6414-14	14	32	15	30	57	243	135	206	16	32	63	2,09
S-6414-16	16	32	17	30	57	243	135	206	16	32	63	2,04
S-6414-19	19	39	20	35	70	297	162	254	19	38	76	3,54
S-6414-22	22	43	24	41	83	346	189	295	23	44	86	5,31
S-6414-25	25	50	27	51	95	397	216	340	26	51	102	8,07
S-6414-29	29	57	30	57	108	444	243	381	30	57	114	13,50
S-6414-32	32	64	34	64	121	494	270	419	30	63	127	16,30
S-6414-35	35	71	37	64	133	540	297	460	33	63	133	21,30
S-6414-38	38	78	40	70	146	591	324	502	37	76	146	29,50
S-6414-44	44	86	47	89	171	689	378	584	43	89	178	42,20
S-6414-51	51	100	54	95	171	798	432	679	46	102	203	65,80
S-6414-57	57	113	60	108	171	835	486	705	65	114	222	93,40
S-6414-60	60	125	64	108	171	879	498	749	65	114	222	109,00
S-6414-63	63	125	67	108	203	879	498	749	65	114	222	103,00
S-6414-70	70	138	74	127	219	978	537	838	76	146	241	158,00
S-6414-76	76	151	80	133	219	1045	603	905	76	146	241	181,00

