

**CLOSED SOCKET
TYPE UNAV 4251.2**



**CAPOCORDA CHIUSO
TIPO UNAV 4251.2**

Material:

Body: Steel Fe G 520 UNI 3158

Safety factor:

Dynamic hoist: WLL 1:4 Breaking force

Static hoist: WLL 1:5 Breaking force

Finish:

Painted or Galvanised

Certificates:

- "EC" declaration of conformity
- Certificate 3.1.B. in acc. to EN 10204 on request
- Italmat can be supplied, upon request, third parties test certificate with IACS member such RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - others

Materiale:

Terminale: Acciaio Fe G 520 UNI 3158

Coefficiente di sicurezza:

Sollevamento dinamico: CMU 1:4 C. R.


Sollevamento statico: CMU 1:5 C. R.

Finitura:

Zincato a caldo oppure verniciata

Certificazione:

- Certificato di conformità "CE"
- Certif. 3.1.B. a norma EN 10204 su richiesta
- Italmat può fornire a richiesta certificazione con Ente di Classifica IACS quali RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - altri

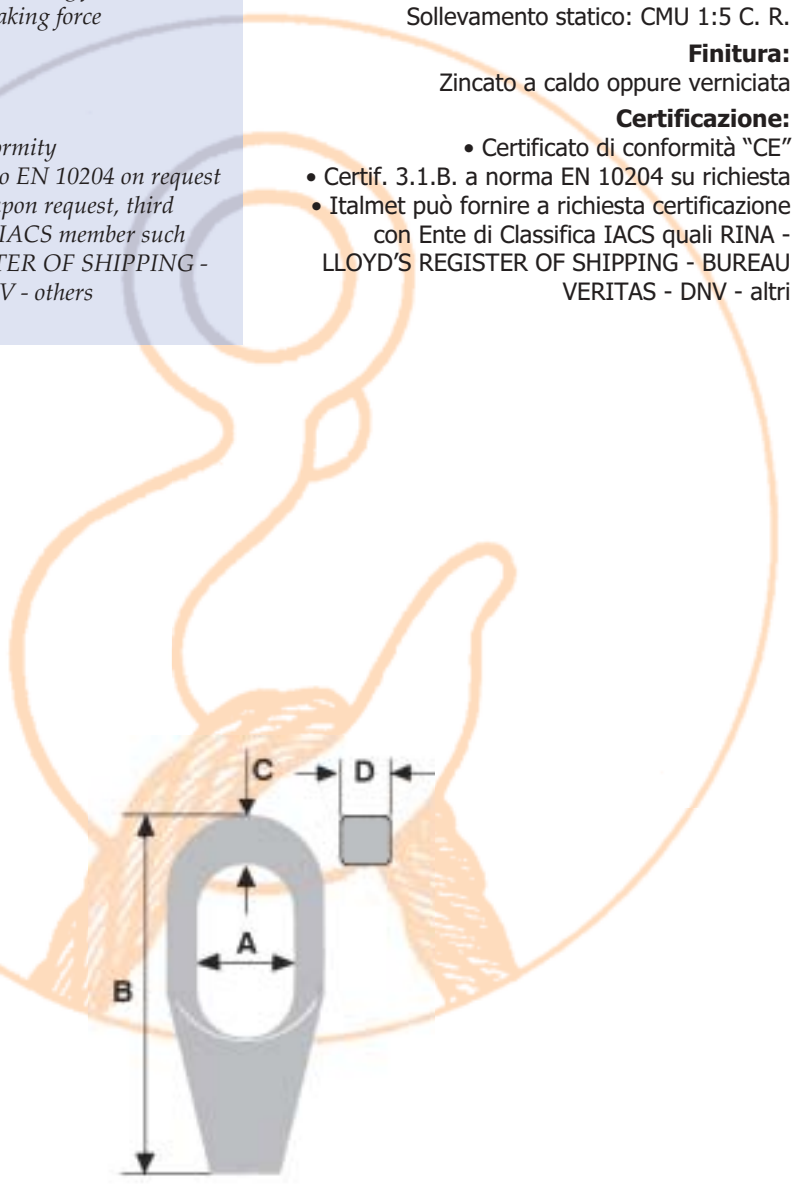

Codice Code	CMU WLL	A	C x D	B	Peso unitario weight per pcs
	t	mm	mm	mm	kg
4251-2	2	38	21 x 17	168	1,0
4251-2.5	2,5	42	24 x 19	182	1,6
4251-3.15	3,15	48	26 x 21	202	2,0
4251-4	4	54	30 x 24	220	2,5
4251-5	5	60	34 x 27	245	3,9
4251-6.3	6,3	66	38 x 30	275	4,7
4251-8	8	73	42 x 33	300	5,8
4251-10	10	80	45 x 36	330	8,0
4251-12.5	12,5	89	51 x 41	370	10,0
4251-16	16	101	56 x 46	415	14,0
4251-20	20	109	62 x 50	460	22,0
4251-25	25	120	69 x 55	505	30,0
4251-31.5	31,5	134	76 x 61	555	40,0
4251-40	40	146	85 x 68	630	-
4251-50	50	160	94 x 75	695	-

