

**CAPOCORDA APERTO A  
FORCELLA TIPO "SPELTER"**

**OPEN  
SPELTER SOCKET**
**Materiale:**

Acciaio colato ASTM A 352 LCC

**Coefficiente di sicurezza:**

CMU 1:5 Carico di rottura

**Finitura:** Zincato a caldo oppure verniciata

**Certificazione:**

- Certificato di conformità "CE"
- Certificato 3.1.B. a norma EN 10204
- Italmet può fornire a richiesta certificazione con Ente di Classifica IACS quali RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - altri

**Material:** Cast steel ASTM A 352 LCC

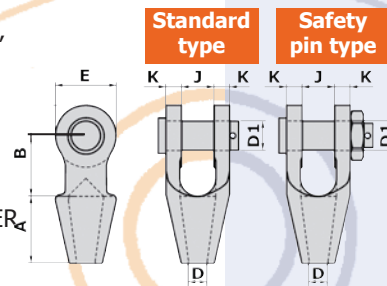
**Safety factor:** WLL 1:5 Breaking force

**Finish:**

Painted or Galvanised

**Certificates:**

- "EC" declaration of conformity
  - Certificate 3.1.B in according to EN 10204
  - Italmet can be supplied, upon request, third parties test certificate with IACS member such RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - others


**OPEN SPELTER SOCKET STANDARD - CAPOCORDA A FORCELLA TIPO "SPELTER"**

Codice	Codice	Misura	Ø Funne		C. R.	Dimensioni / Main dimension						Peso un	
Code	Code	Size	Ø Wire		MBL	A	B	E	D	D1	J	K	Weight pcs
Zinc.-Galvan.	Vernic.-Painted		mm	inch	t	mm	mm	mm	mm	mm	mm	mm	kg
S02#100G	-	100	18-19	3/4	32	89	76	80	21	35	38	16	4
S02#104G	-	104	20-22	7/8	45	101	89	90	24	41	44	19	5
S02#108G	-	108	24-27	1	70	114	101	120	28	51	51	22	7
S02#111G	-	111	27-30	1 1/8	100	127	114	130	32	57	57	25	12
S02#115G	-	115	31-36	1 1/4 - 1 3/8	125	139	127	144	38	63	63	28	16
S02#118G	S02#118P	118	37-39	1 1/2	150	152	162	160	41	70	76	30	24
S02#120G	S02#120P	120	40-42	1 5/8	200	165	165	176	44	76	76	33	27
S02#125G	S02#125G	125	43-48	1 3/4 - 1 7/8	260	190	178	200	51	89	89	39	38
S02#128G	S02#128G	128	49-54	2 - 2 1/8	280	216	228	216	57	95	101	46	59
S02#130G	S02#130G	130	55-60	2 1/4 - 2 3/8	360	228	250	236	63	108	113	53	87
S02#132G	S02#132G	132	61-68	2 1/2 - 2 5/8	450	248	273	264	73	121	127	60	130
S02#135G	S02#135G	135	69-75	2 3/4 - 2 7/8	480	279	279	276	79	127	133	73	157
S02#138G	S02#138G	138	76-80	3 - 3 1/8	520	305	286	284	86	133	146	76	192
S02#140G	S02#140G	140	81-86	3 1/4 - 3 3/8	600	330	298	296	92	140	159	79	243
S02#142G	S02#142G	142	87-93	3 1/2 - 3 5/8	700	356	318	340	99	152	171	83	287
S02#144G	S02#144G	144	94-102	3 3/4 - 4	875	381	343	362	108	178	191	89	370
S02#146G	S02#146G	146	108-115	4 1/2	1100	460	480	440	125	190	208	101	447
S02#150G	S02#150G	150	122-130	5	1250	500	500	560	138	250	210	120	750
S02#160G	S02#160G	160	140-155	5 1/2 - 6	1400	580	500	600	160	275	230	140	880
S02#170G	S02#170G	170	158-167	6 1/2	1600	675	600	650	175	290	230	175	1040

**OPEN SPELTER SOCKET SAFETY PIN**
**CAPOCORDA APERTO TIPO "SPELTER" CON DADO E COPPIGLIA**

Codice	Codice	Misura	Ø Funne		C.R.	Dimensioni / Main dimension						Peso un	
Code	Code	Size	Ø Wire		MBL	A	B	E	D	D1	J	K	Weight pcs
Zinc.-Galvan.	Vernic.-Painted		mm	inch	t	mm	mm	mm	mm	mm	mm	mm	kg
S02SP#192G	-	192	6-7	1/4	3	52	40	34	8	17	17	8	0,4
S02SP#194G	-	194	8-10	3/8	6	58	45	40	11	21	20	11	0,6
S02SP#196G	-	196	11-13	1/2	12	64	51	49	14	25	25	16	1,3
S02SP#198G	-	198	14-16	5/8	24	76	64	57	18	31	32	18	2
S02SP#100G	-	100	18-19	3/4	32	89	76	80	21	35	38	16	4
S02SP#104G	-	104	20-22	7/8	45	101	89	90	24	41	44	19	5
S02SP#108G	-	108	24-27	1	70	114	101	120	28	51	51	22	7
S02SP#111G	-	111	27-30	1 1/8	100	127	114	130	32	57	57	25	12
S02SP#115G	-	115	31-36	1 1/4 - 1 3/8	125	139	127	144	38	63	63	28	16
S02SP#118G	S02SP#118P	118	37-39	1 1/2	150	152	162	160	41	70	76	30	24
S02SP#120G	S02SP#120P	120	40-42	1 5/8	200	165	165	176	44	76	76	33	27
S02SP#125G	S02SP#125P	125	43-48	1 3/4 - 1 7/8	260	190	178	200	51	89	89	39	38
S02SP#128G	S02SP#128P	128	49-54	2 - 2 1/8	280	216	228	216	57	95	101	46	59
S02SP#130G	S02SP#130P	130	55-60	2 1/4 - 2 3/8	360	228	250	236	63	108	113	53	87
S02SP#132G	S02SP#132P	132	61-68	2 1/2 - 2 5/8	450	248	273	264	73	121	127	60	130
S02SP#135G	S02SP#135P	135	69-75	2 3/4 - 2 7/8	480	279	279	276	79	127	133	73	157
S02SP#138G	S02SP#138P	138	76-80	3 - 3 1/8	520	305	286	284	86	133	146	76	192
S02SP#140G	S02SP#140P	140	81-86	3 1/4 - 3 3/8	600	330	298	296	92	140	159	79	243
S02SP#142G	S02SP#142P	142	87-93	3 1/2 - 3 5/8	700	356	318	340	99	152	171	83	287
S02SP#144G	S02SP#144P	144	94-102	3 3/4 - 4	875	381	343	362	108	178	191	89	370
S02SP#146G	S02SP#146P	146	108-115	4 1/2	1100	460	480	440	125	190	208	101	447
S02SP#150G	S02SP#150P	150	122-130	5	1250	500	500	560	138	250	210	120	750
S02SP#160G	S02SP#160P	160	140-155	5 1/2 - 6	1400	580	500	600	160	275	230	140	880
S02SP#170G	S02SP#170P	170	158-167	6 1/2	1600	675	600	650	175	290	230	175	1040

Tolerance 5%

Per funi da 6 a 16 mm i capocorda si intendono corredati da dado e coppiglia / The open spelter socket for rope 6 up to 16 mm are available only with safety pin