

**OPEN SOCKET  
TYPE UNAV 4252.3**



**Material:**

Body: Steel Fe G 520 UNI 3158  
Pin: Steel Fe G 510 UNI 10025

**Safety factor:**

Dynamic hoist: WLL 1:4 Breaking force  
Static hoist: WLL 1:5 Breaking force

**Finish:**

Painted or Galvanised

**Certificates:**

- "EC" declaration of conformity
- Certificate 3.1.B. in acc. to EN 10204 on request
- Italmat can be supplied, upon request, third parties test certificate with IACS member such RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - others

**CAPOCORDA APERTO  
TIPO UNAV 4252.3**

**Materiale:**

Terminale: Acciaio Fe G 520 UNI 3158  
Perno: Acciaio Fe G 510 UNI 10025

**Coefficiente di sicurezza:**


Sollevamento dinamico: CMU 1:4 C. R.  
Sollevamento statico: CMU 1:5 C. R.

**Finitura:**

Zincata a caldo oppure verniciata

**Certificazione:**

- Certificato di conformità "CE"
- Certif. 3.1.B. a norma EN 10204 su richiesta
- Italmat può fornire a richiesta certificazione con Ente di Classifica IACS quali RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - altri

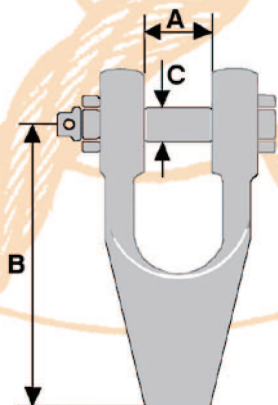

Codice Code	CMU WLL	Ø fune Ø rope	C	A	B	Peso unitario weight per pcs
	t	mm	mm	mm	mm	kg
4252-1.6	1,6	14	20	28	116	2,0
4252-2	2	15	22	32	132	2,4
4252-2.5	2,5	16	25	36	148	2,6
4252-3.15	3,15	19	28	40	165	3,0
4252-4	4	22	32	45	180	4,0
4252-5	5	24	36	50	200	5,5
4252-6.3	6,3	26	40	55	220	7,0
4252-8	8	30	42	60	242	9,0
4252-10	10	34	45	65	265	13,0
4252-12.5	12,5	38	50	70	290	17,0
4252-16	16	43	56	80	332	25,0
4252-20	20	46	63	90	365	32,0
4252-25	25	52	70	100	405	46,0
4252-31.5	31,5	58	80	110	440	65,0
4252-40	40	61	90	125	500	-
4252-50	50	64	100	140	550	-

