

TOO/TOG


TENDITORE
TIPO OCCHIO-OCCHIO

Materiale: Canaule: Fe 410 B
 Anello: CB 4 FF da 5 a 16 mm
 Anello: Fe 410 B da 18 a 38 mm

Coefficiente di sicurezza:
 CMU 1:4 Carico di rottura

Finitura:
 Zincatura Fe/Zn 5c 1 A

Certificazione:
 • Certificato di conformità "CE"

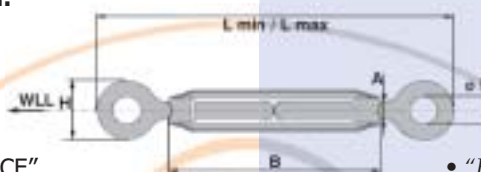

TURNBUCKLES
TYPE EYE-EYE

Material: Body: Fe 410B
 Fitting: CB 4 FF (5 up to 16 mm)
 Fitting: Fe 410 B (18 up to 38 mm)

Safety factor:
 WLL 1:4 Breaking force

Finish:
 Galvanized Fe/Zn 5c 1A

Certificates:
 • "EC" declaration of conformity



Codice	A	A	B	F	H	L	L	CMU/WLL	Ø fune	peso
Code	Ø mm	Ø in	mm	mm	mm	min	max	kg	mm	g
TENDZO/OM5	M5	3/16	80	8	16	118	175	115	2,0	48
TENDZO/OM6	M6	1/4	80	10	20	130	193	160	2,5	62
TENDZO/OM8	M8	5/16	105	11	22	158	240	300	2,5	109
TENDZO/OM10	M10	3/8	125	14	27	192	289	470	3,5	194
TENDZO/OM11	M11	7/16	135	15	29	206	310	580	3,5	267
TENDZO/OM12	M12	1/2	140	17	33	226	332	690	4,0	325
TENDZO/OM14	M14	9/16	170	18	35	256	386	940	4,0	386
TENDZO/OM16	M16	5/8	190	23	46	290	435	1290	6,0	435
TENDZO/OM18	M18	11/16	205	28	59	358	512	1660	7,0	512
TENDZO/OM20	M20	3/4	220	28	59	358	522	2130	7,5	522
TENDZO/OM22	M22	7/8	240	34	70	400	579	2630	9,0	579
TENDZO/OM24	M24	1	260	36	76	436	628	3060	10,0	628
TENDZO/OM27	M27	1 1/8	270	38	82	474	668	4000	11,0	668
TENDZO/OM30	M30	1 3/16	280	40	86	498	694	4860	11,5	694
TENDZO/OM33	M33	1 1/4	290	41	89	516	732	6040	12,0	732
TENDZO/OM35	M35	1 3/8	300	43	95	532	740	6500	13,0	740
TENDZO/OM38	M38	1 1/2	300	45	102	544	743	7900	14,0	743

TENDITORE
TIPO OCCHIO-GANCIO

Materiale: Canaule: Fe 410 B
 Anello: CB 4 FF da 5 a 16 mm
 Anello: Fe 410 B da 18 a 38 mm
 Gancio: 3 CD 6 da 5 a 11 mm
 Gancio: Fe 410 B da 12 a 27 mm

Coefficiente di sicurezza:
 CMU 1:4 Carico di rottura

Finitura:
 Zincatura Fe/Zn 5c 1 A

Certificazione:
 • Certificato di conformità "CE"

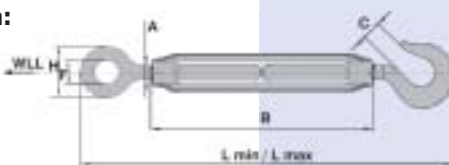

TURNBUCKLES
TYPE EYE-HOOK

Material: Body: Fe 410B
 Fitting: CB 4 FF (5 up to 16 mm)
 Fitting: Fe 410 B (18 up to 38 mm)
 Hook: 3 CD 6 (5 up to 11 mm)
 Hook: Fe 410 B (12 up to 27 mm)

Safety factor:
 WLL 1:4 Breaking force

Finish:
 Galvanized Fe/Zn 5c 1A

Certificates:
 • "EC" declaration of conformity



Codice	A	A"	B	C	F	H	L	L	CMU/WLL	Ø fune	peso
Code	Ø mm	Ø in	mm	mm	mm	mm	min	max	kg	mm	g
TENDZO/GM5	M5	3/16	80	6,0	8	17	121	181	25	2,0	49
TENDZO/GM6	M6	1/4	80	8,0	10	22	132	195	45	2,5	61
TENDZO/GM8	M8	5/16	105	10,0	11	30	170	251	95	2,5	115
TENDZO/GM10	M10	3/8	125	12,5	14	36	204	296	140	3,5	202
TENDZO/GM11	M11	7/16	135	12,5	15	36	221	320	165	3,5	276
TENDZO/GM12	M12	1/2	140	17,5	17	56	244	350	300	4,0	400
TENDZO/GM14	M14	9/16	170	21,0	18	66	284	414	420	4,0	650
TENDZO/GM16	M16	5/8	190	24,0	23	77	322	475	570	6,0	1000
TENDZO/GM18	M18	11/16	205	27,0	28	85	373	517	700	7,0	1390
TENDZO/GM20	M20	3/4	220	30,0	28	95	391	555	900	7,5	1840
TENDZO/GM22	M22	7/8	240	34,0	34	106	433	612	1100	9,0	2520
TENDZO/GM24	M24	1	260	36,0	36	114	470	662	1300	10,0	3450
TENDZO/GM27	M27	1 1/8	270	38,0	38	123	503	697	2300	11,0	4990