

SWIVEL EYE-EYE



TORNICHETTO GIREVOLE
OCCHIO-OCCHIO

Material:

high tensile steel, quenched and tempered

Safety factor:

WLL 1:5 Breaking force

Finish:

hot dipped galvanized

Certificates:

- "EC" declaration of conformity
- Certificate 3.1.B. in acc. to EN 10204 on request
- Italmat can be supplied, upon request, third parties test certificate with IACS member such RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - others

Materiale:

acciaio legato ad elevata resistenza

Coefficiente di sicurezza:


CMU 1:5 Carico di rottura

Finitura:

zincato a caldo

Certificazione:

- Certificato di conformità "CE"
- Certif. 3.1.B. a norma EN 10204 su richiesta
- Italmat può fornire a richiesta certificazione con Ente di Classifica IACS quali RINA - LLOYD'S REGISTER OF SHIPPING - BUREAU VERITAS - DNV - altri

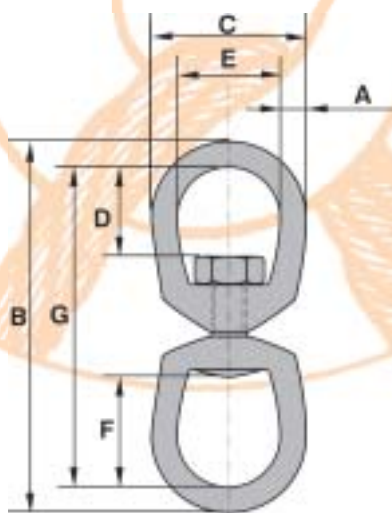

Code	WLL	bow diameter	length outside	width outside	length inside	width inside	length inside	length	weight per pce
Code	WLL	bow diameter	length outside	width outside	length inside	width inside	length inside	length	weight per pce
Code	WLL	bow diameter	length outside	width outside	length inside	width inside	length inside	length	weight per pce
Code	WLL	bow diameter	length outside	width outside	length inside	width inside	length inside	length	weight per pce
TGOO0.39	0,39	6	87	32	17	19	27	75	0,10
TGOO0.57	0,57	8	106	41	21	25	32	90	0,18
TGOO1.02	1,02	10	130	51	24	32	38	110	0,32
TGOO1.6	1,6	13	164	64	33	38	51	138	0,60
TGOO2.4	2,4	16	199	76	40	44	60	167	1,13
TGOO3.3	3,3	19	221	89	44	51	67	183	1,82
TGOO4.5	4,5	22	257	102	52	57	78	213	2,83
TGOO5.7	5,7	25	295	114	59	64	89	245	4,06
TGOO7.0	7,0	26	345	129	82	77	82	293	6,79
TGOO8.2	8,2	32	355	143	68	80	94	291	7,43
TGOO11.0	11,0	29	377	148	91	90	91	319	10,24
TGOO15.0	15,0	34,5	445	165	95	96	95	376	16,56
TGOO20.5	20,5	38	511	178	106	102	106	435	20,80
TGOO22.0	22,0	40	545	200	121	120	121	465	27,83

